



# KSR115

## 1U rack mount 15" TFT console

KSR115 is cost efficiency industrial level input solution, easy to install and use.


KSR115 provide optimize your space utilization by controlling your system in just 1U rack space.

### Features

- Single Rail easy to install and use
- Support 17 various keyboard languages
- Bright Active Matrix TFT Display
- OSD function (On Screen Display) for LCD display
- Durable keyboards
- Panel protected by tempered glass
- Support USB K/B, touchpad



### Dimension and diagram

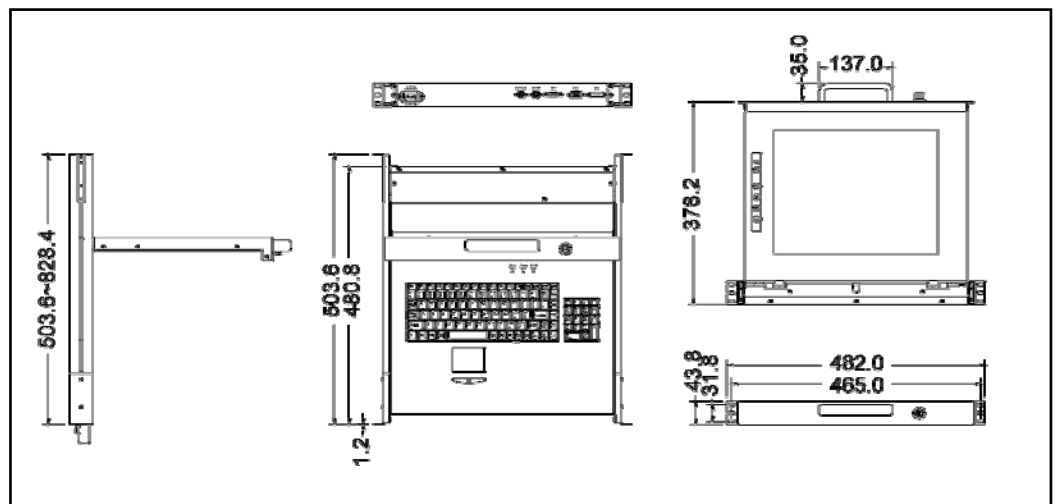

# KSR115

1U rack mount 15" TFT console

## Specification

Model Name	KSR115
Number of ports	1
Dimension	482 x 447.5 x 44 mm / 19.0 x 17.6 x 1.7 inches
Package Dimension	677 x 564 x 206 mm/ 26.7 x 22.2 x 8.1 inches
Net Weight	11.0 Kg / 24.3 lbs
Gross Weight	18.0 Kg / 39.7 lbs
Display Size	15 inches
Panel Type	Active Matrix TFT LCD
Resolution Capabilities	Maximum Resolution up to 1024 x 768 (XGA)
Pixel Pitch	Supports 0.297 mm x 0.297 mm
Viewing Angle (CR>10)	Right-Left view 130° (Typ) Up-Down View 100° (Typ)
Contrast Ratio	400 : 1
Brightness	White 250 cd/m <sup>2</sup> (Center 1 point Typ)
Back Light	Dual Lamps for Back Light
Supported Colors	16M Colors (6-bit with FRC)
Response Time	Rising Time 5 ms, Decay Time 11 ms
Operating System	DOS, Windows (3.1, 9x, 2000, NT4, ME, XP, 2003 Server) Linux, Novell 3.12-6, HP UX, SUN
Multi Platform	Support PS/2 and USB interface
System Cables	VGA + 2 x PS/2 or VGA + 1 x USB cable
Keyboard Mouse	106 key PS/2 keyboard with touch pad
Sync	45 ~ 80 KHz
Power Source	100 ~ 240 VAC input
Power Consumption	16W, 10.41W for Panel
Temperature	Operate 0° ~ 50° C / 32° ~ 122° F Storage-20° ~ 60° C / -4° ~ 140° F
Humidity	10% ~ 90% RH
Chassis Construction	Heavy duty steel materials
Keyboard Language	USA, UK, German, French, Spanish, Italian, Portuguese, Dutch, Swiss, Belgium, Swedish, Norwegian, Danish, Japan, Taiwan, Russian, Hebrew
Certification	CE / FCC, UL / CUL / C-Tick

## Ordering Optional

Color (Black / Beige / OEM color)

Cherry keyboard with trackball (PS/2 only)

Rear bracket extension up to 1000mm

Signal cable 1.8m / 3.0m / 5.0m